

Pedal Valves

Note: Pedal valves with metering cartridges recommended for use with higher water pressures or when hammer arrestors are not used.

- All models have:
- Self closing valve
 - 1/2" NPT inlet and outlet
 - Extended pedals (wall mounted models)
 - Pedals flip up and stay up for cleaning (wall mounted models)

B-0502 Double Pedal Valve, Floor Mounted


- Inlets on 2-1/2" (64 mm) centers
- 1" (25 mm) from floor to center of inlets
- 1/2" NPT female inlets and outlets
- Furnished with two wood mounting screws



B-0502-LKS Same as B-0502 except with loose key stops
B-0502-SL Same as B-0502 except with metering cartridges

B-0504-01 Double Pedal Valve, Wall Mounted

- Inlets on 2-1/2" (64 mm) centers
- 1" (25 mm) from floor to center of inlets
- Wall to pedal tips approximately 13-3/4" (349 mm)
- Angle loose key stops (B-1350)
- Top mounted volume control angle loose key stop (B-1355)
- 1/2" NPT female inlets and outlets

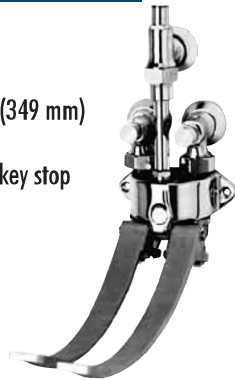

B-0504-02 Same as B-0504-01 except with volume control straight loose key stop (B-0416)

B-0507 Single Pedal Valve, Floor Mounted


- For hot or cold water
- 1" (25 mm) from floor to center of inlets
- 1/2" NPT female inlet and outlet
- Furnished with two wood mounting screws



B-0507-02 Same as B-0507 except with check valve

B-0508-01 Single Pedal Valve, Wall Mounted

- For hot or cold water
- 1" (25 mm) from wall to center of inlet
- Wall to pedal tip approximately 13-3/4" (349 mm)
- Angle loose key stop on inlet (B-1350)
- Loose key volume control valve with 3/8" IPS female outlet (B-1355)
- 1/2" NPT female inlet and outlet



B-0504 Double Pedal Valve, Wall Mounted

- Inlets on 2-1/2" (64 mm) centers
- 1" (25 mm) from wall to center of outlets
- Wall to pedal tips approximately 13-3/4" (349 mm)
- 1/2" NPT female inlets and outlets
- Furnished with two wood mounting screws



B-0504-LKS Same as B-0504 except with straight loose key stops
B-0504-SL Same as B-0504 except with metering cartridges
B-0504-03 Same as B-0504 except with loose key angle stops
B-0504-03SL Same as B-0504-03 except with metering cartridges

B-0505 Double Pedal Valve, Ledge Mounted

- Inlets on 2-1/2" (64 mm) centers
- Rough chrome plated
- 1/2" NPT female inlets and outlets
- Furnished with two wood mounting screws



B-0505-SL Same as B-0505 except with metering cartridges

B-0508 Single Pedal Valve, Wall Mounted

- For hot or cold water
- 1" (25 mm) from wall to center of inlet
- Wall to pedal tip approximately 13-3/4" (349 mm)
- 1/2" NPT female inlet and outlet



B-0508-LKS Same as B-0508 except with straight loose key stop; see page D28

B-2464 Single Pedal Valve & Rigid Gooseneck Spout

- Includes the B-0507 single pedal valve and B-0520 rigid gooseneck spout and rosespray outlet

