




Fre-flo Showerhead, 4-282 Series

Specification Submittal

Location:



Model Numbers

- ☐ 4-282F 1/2 inch-14 NPT female ball joint
- ☐ 4-282M 1/2 inch MIPS threaded connection

Options / Modifications

Append appropriate -suffix to model number.

- ☐ -2.0 2.0 (7.6 L/min) flow rate restrictor
- ☐ -1.5 1.5 (5.7 L/min) flow rate restrictor
- ☐ -OWBJ One way ball joint
- ☐ -VP Vandal resistant

Finish Options / Modifications

Append appropriate -suffix to model number.

- Polished chrome finish (standard)

Feature Highlights

- Fre-flo single mode brass showerhead
- Full pulsating massage and soft shower water saving spray modes
- Standard flow rate is 2.5 gpm /(9.5 L/min)
Optional lower flow rate restrictors savailable
- Polished chrome finish (standard)



Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- **Limited Lifetime** - to the original end purchaser in residential / consumer installations.
- **5 years** - for commercial installations

Dimensions Showerhead, 4-282F

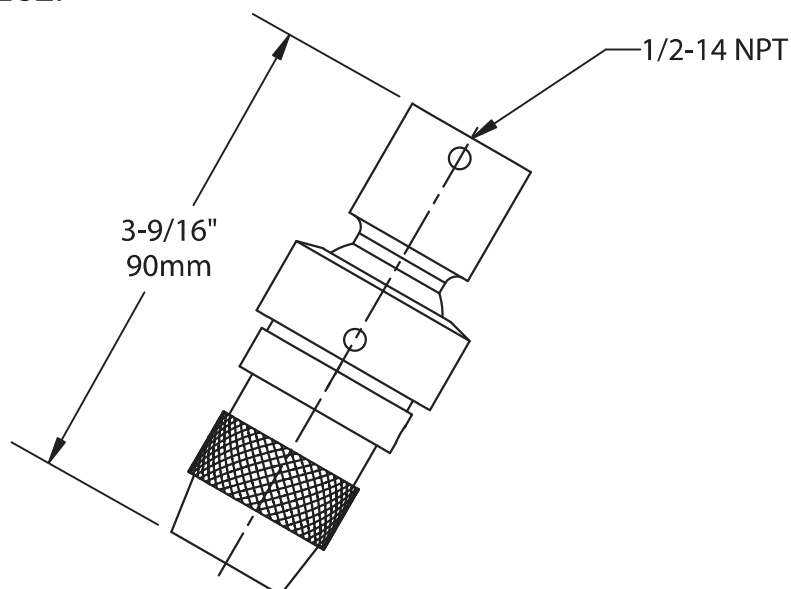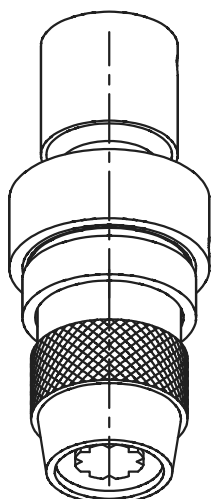

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 664-1300
 Website: www.symmons.com ■ Email: customerservice@symmons.com

©2008, 2009 Symmons Industries, Inc. Printed in U.S.A. ■ 102809

SYMMONS®
the smart choice™