





Location:



4-282 Series
Fre-flo Showerhead
Specification Submittal




| Model Numbers | Feature Highlights |
|--|---|
| <input type="checkbox"/> 4-282F 1/2 inch-14 NPT female ball joint <input type="checkbox"/> 4-282M 1/2 inch MIPS threaded connection | <ul style="list-style-type: none">• Fre-flo single mode brass showerhead• Full spray and soft shower water saving spray modes• 2.0 gpm (7.6 L/min) standard flow restrictor• Optional lower flow rate restrictors available• Polished chrome finish (standard) |
| Options/ Modifications | |
| <input type="checkbox"/> -VP Vandal-resistant shower head <input type="checkbox"/> -OWBJ One-way ball joint <input type="checkbox"/> -1.5 1.5 (5.7 L/min) flow rate restrictor Note: Append appropriate -suffix to model number. | |
| Compliance | Warranty |
| <ul style="list-style-type: none">- ASME A112.18.1/CSA B125.1- Buy American Act Compliant <div></div> | <p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p>  |

Architectural/ Engineering Specification

Symmons Fre-flo_Showerhead _____ Includes Fre-flo single mode brass showerhead, Full spray and soft shower water saving spray modes, 2.0 gpm (7.6 L/min) standard flow restrictor, Optional lower flow rate restrictors available, Polished chrome finish (standard). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1/ Buy American Act Compliant. Available options: "-VP - Vandal-resistant shower head", "-OWBJ - One-way ball joint", "-1.5 - 1.5 (5.7 L/min) flow rate restrictor".

Dimensions

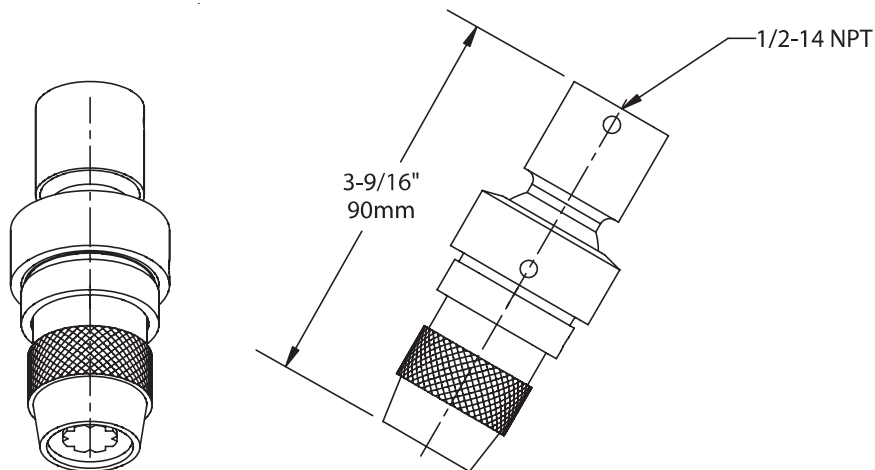

Note: Dimensions subject to change without notice.