


Z1333XL

ECOLOTROL CERAMIC DISC WALL HYDRANT Exposed, Anti-Siphon, Automatic Draining, Moderate Climate

SPECIFICATION	SHEET
TAC	

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

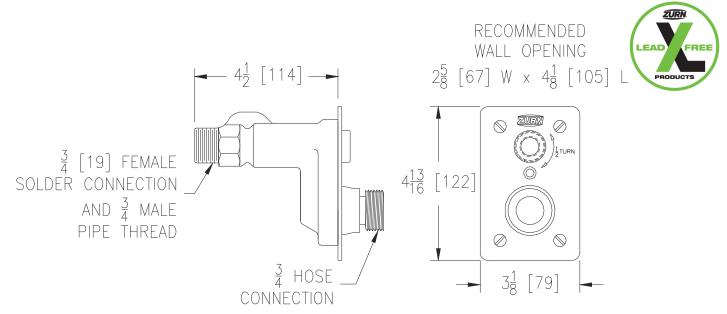

Wall	Approx.
Thickness	Wt.
in [mm]	lbs [kg]
6 [152]	3 [1]

ENGINEERING SPECIFICATION: ZURN Z1333XL


Exposed, Ecolotrol[™], lead-free, anti-siphon, moderate / interior wall hydrant for flush installation. Hydrant features integral backflow preventer with anti-siphon technology, all-bronze interior components with 1/2 turn long-life ceramic disc cartridge, combination 3/4" [19mm] female solder and 3/4" male pipe thread inlet connection, and 3/4" male hose connection. Hydrant furnished with type 304 stainless steel faceplate and includes operating key.

Zurn "XL" Lead-Free compliant products are a line of durable plumbing products designed and manufactured to comply with state laws and local codes that mandate maximum allowable lead content levels. Zurn "XL" products are manufactured in accordance to the Federal SWDA section 1417.

Item Name

2

3

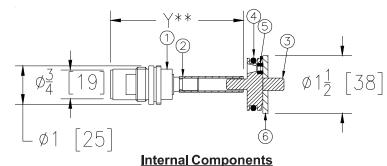

OPTIONS (Check/specify appropriate options)

SUFFIXES

Polished Bronze Face -PB Hydrant Parts Repair Kit (HYD-RK-Z1321XL/33XL) -RK Ceramic Cartridge Removal Tool -RT12 (up to 12 [305] wall)

4 O-Ring 5 O-Ring 1 Retaining Washer 1

Quan.

1

Zurn Industries, LLC | Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 Ph. 855-663-9876, Fax 814-454-7929 In Canada | Zurn Industries Limited

В Date: 09/28/2017

Rev.

Ceramic Cartridge

Operating Coupling

Operating Tube

C.N. No. 138012

Prod. | Dwg. No. Z1333XL

^{*} Regularly furnished unless otherwise specified.

^{**} When ordering replacement cartridge assembly Specify Y dim.